

EXPANDING SOLUTIONS

RELAY TERMINAL UNIT




'elmex' introduces 6.2 mm, One Changeover & Solid State, terminal unit along with 14.5 mm Two Changeover Relay Terminal Unit for C & I and Automation industry. 6.2 mm housing makes it obvious choice for space constraint applications. These units are designed for mounting on TS 35 TOP HAT rails compliant to DIN Standards.

These units are available for **24V DC/AC** and **220V DC/AC** actuating signals.

Features

- 6.2 mm and 14.5 mm wide housing made from polyamide 6,6 complying flammability characteristics as per UL 94.
- Conductor clamping unit is positioned at 20 degrees for ease of control wire entry with minimum spacing between unit and cable ducts.
- Relay terminal unit comes with an actuating arm to facilitate detaching of relay from the terminal unit and functions also for retaining relay within housing when in operation.
- Relay terminal unit is designed for both AC and DC system.
- 70µ copper clad PCB is housed within the unit.
- Polarity independent coil connection.
- Quick connection shorting link for interconnecting multiple relay terminal unit specially for marking common coil / pole connection.




Relay Coil Energised Indication




Quick Connect Links



Lever For Detaching Relays

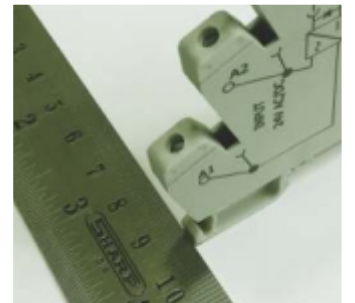

Sleek Design

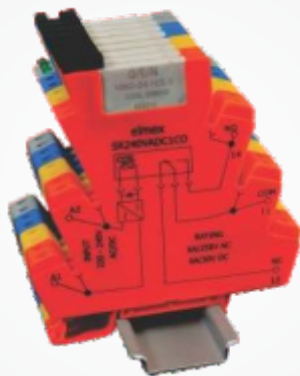

1 Changeover Electromechanical 6.2 mm Relay Terminal Unit

Versions

SR 24 V ADC 1 CO

SR 240 V ADC 1 CO

Base Unit

Pitch (in mm)	6.2
Dimensions (Height X Width)(in mm)	91.50 X 88.20
Connection Poles	2 Coil Side 3 Contact Side
Connection Possibility	2.5 Sq. mm.
Screw Size	M 2.6
Torque	0.4 Nm

Relay Actuation Data

Nominal Voltage(Vn) to actuate	24 V DC/AC	220 V DC/AC
Must Pick-up Voltage	18 V DC/AC	190 V DC/AC
Must Drop Voltage	4 V DC/AC	35 V DC/AC
Nominal Current(In) to actuate	10 mA	15 mA

Contact Data

Contact Rating	6 A, 250 VAC / 30 VDC
Compatible Contact Arrangement	1 FORM A, 1 FORM C
Contact Material	AgNi
Contact Resistance	100 mΩ @ 6 VDC, 1 A
Maximum Switching Power	1500 VA / 144 W

Relay Endurance Data

Mechanical	1 X 10 ⁷ OPS
Electrical (Ohmic)	3 X 10 ⁴ OPS



Insulation


Resistance(Initial)	Minimum 1000 MΩ at 500 VDC
Dielectric Strength	1000 VAC (50 Hz.) for 1 Minute

Others

Operating Temperature	-20°C to 55°C
-----------------------	---------------

Applications

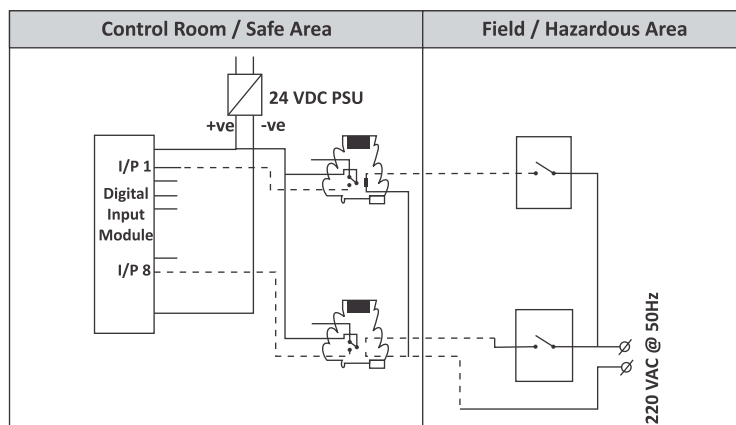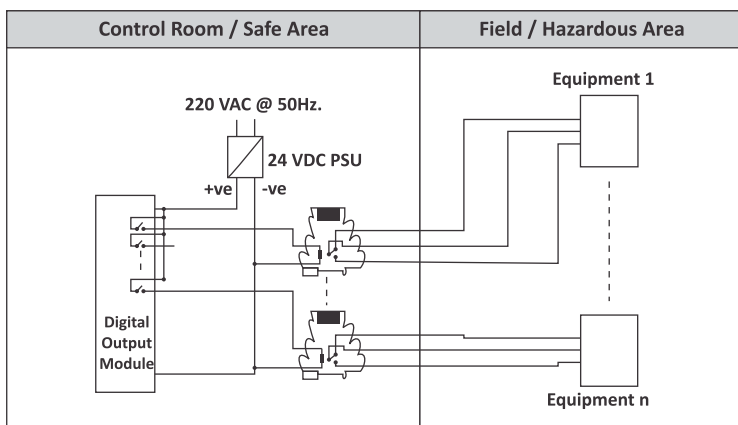

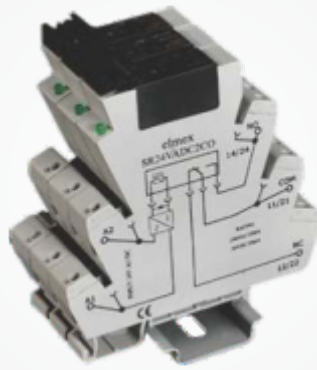

2 Changeover Electromechanical 14.5 mm Relay Terminal Unit

Versions

SR 24 V ADC 2 CO

SR 240 V ADC 2 CO

Base Unit

Pitch (in mm)	14.5
Dimensions (Height X Width)(in mm)	91.50 X 88.20
Connection Poles	2 Coil Side 3 Contact Side
Connection Possibility	2.5 Sq. mm.
Screw Size	M 2.6
Torque	0.4 Nm

Relay Actuation Data

Nominal Voltage(Vn) to actuate	24 V DC/AC	220 V DC/AC
Must Pick-up Voltage	19 V DC/AC	200 V DC/AC
Must Drop Voltage	4 V DC/AC	50 V DC/AC
Nominal Current(In) to actuate	25 mA	10 mA

Contact Data

Contact Rating	2X6 A, 250 VAC/ 30 VDC
Compatible Contact Arrangement	2 FORM C
Contact Material	AgCdO
Contact Resistance	100 mΩ @ 6 VDC, 1 A
Maximum Switching Power	1500 VA (per contact)

Relay Endurance Data

Mechanical	1 X 10 ⁷ OPS
Electrical (Ohmic)	1 X 10 ⁵ OPS



Insulation

Resistance(Initial)	Minimum 1000 MΩ at 500 VDC
Dielectric Strength	1000 VAC (50 Hz.) for 1 Minute

Others

Operating Temperature	-20°C to 55°C
-----------------------	---------------

Applications

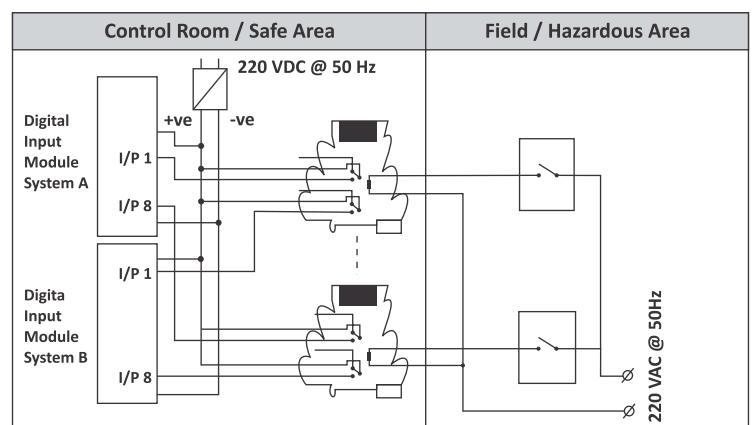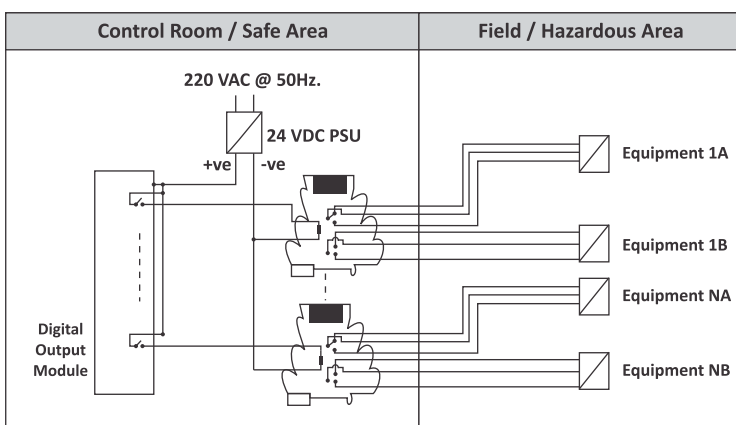



Solid State 6.2 mm Relay Terminal Unit

Versions

SR 24 V DD 24 SSR

SR 24 V DA 24 SSR

Base Unit

Pitch (in mm)	6.2
Dimensions (Height X Width)(in mm)	91.50 X 88.20
Connection Poles	2 Coil Side 2 Contact Side
Connection Possibility	2.5 Sq. mm.
Screw Size	M 2.6
Torque	0.4 Nm


Relay Actuation Data

Input Control Voltage	3 - 32 VDC	3 - 32 VDC
Input Control Supply Current	12 mA	12 mA

Relay Output Specification

Contact Configuration	1 NO	1 NO
Rated Voltage	5 - 100 VDC	24 - 280 VAC
Rated Current	2 A @ 55°C	2 A @ 55°C
Other Technical Data		
ON Time	2.5 m Secs	Zero Crossing Detector Based
OFF Time	2.5 μ Secs	Zero Crossing Detector Based
Operating Temperature	-20°C to 55°C	

Applications

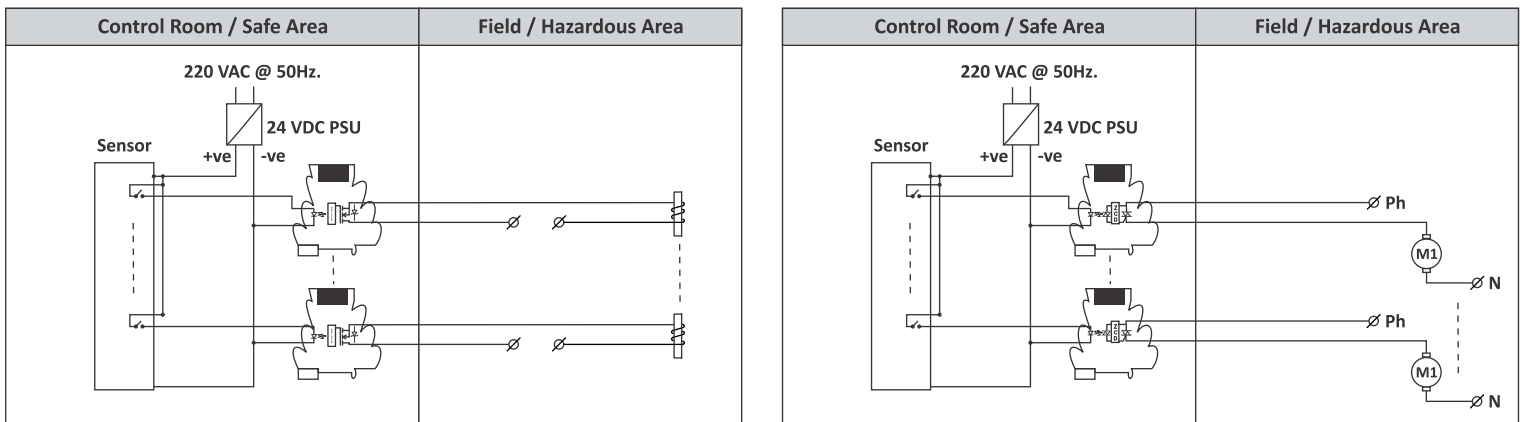

Elmex Controls Pvt. Ltd.
Elmex Electric Pvt. Ltd.

12, GIDC Estate, Makarpura Road, Vadodara 390 010, India.
Telephones: +91-265-2642021, 2642023 ❖ Facsimile: +91-265-2638646
e-mail: marketing@elmex.net ❖ URL: www.elmex.net

