



DSDT2.5-2X2

Terminal Type - DSDT2.5-2X2, Knife Disconnecting terminal block, nominal voltage: 1000 V, nominal current: 17.5 A, Rated cross-section - 2.5 mm², connection method: Spring Cage connection, number of connections: 4, cross-section: 0.5 mm² - 2.5 mm², mounting type: TS 35/7.5, TS 35/15, colour: GREY



Approvals

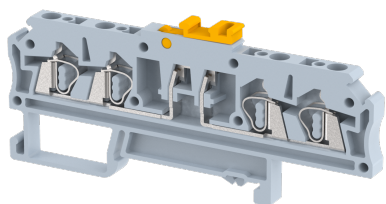

General Information

Product Name	DSDT2.5-2X2
Connection Method	Spring Cage Connection
Rating	1000 V/17.5 A/2.5 mm ² /NAP Nm
HSN Number	85389000
Standard Packing Qty(in No)	100
Country Of Origin	India
Screw thread	NAP

Dimensions & Weight

Width	5 mm	0.2 inch
Length	85 mm	3.35 inch
Height	37.5 mm	1.48 inch
Weight of std. Packing Unit	1.2 Kg	

Material Data

Insulating Material	Polyamide 6,6
Standard Colour	Gray
Colour Variants	Red , Yellow , Blue , Black , Green , Khakhi ,

Rated Conductor Size

Conductor cross section flexible min	0.5 mm ²
Conductor cross section flexible max	2.5 mm ²
Conductor cross section solid min	0.5 mm ²
Conductor cross section solid max	2.5 mm ²

Ratings - IEC

Connection in acc. with standard	IEC 60947-7-1
Nominal Voltage U_n	1000 V
Nominal Current I_n	17.5 A
Nominal cross section	2.5 mm ²
Short-time current	0.18 kA
Rated surge voltage	8 kV
Degree of pollution	3

Ratings - ATEX

ATEX Standard	
ATEX Nominal Voltage U_n	0 V
ATEX Nominal Current I_n	0 A
ATEX Cross Sec. Flexible Max.	0 mm ²

Ratings - CSA

CSA Standard	CSA C22.2 NO 158
B - CSA Nominal Voltage U_N	600 V
B - CSA Nominal Current I_N	15 A
B - CSA Wire Min	22 AWG
B - CSA Wire Max	14 AWG

Ratings - UL

UL Standard	
B - UL Nominal Voltage U_N	0 V
B - UL Nominal Current I_N	0 A
B - UL Wire Min	AWG
B - UL Wire Max	AWG